


## GF7050V-M7 SE Motherboard

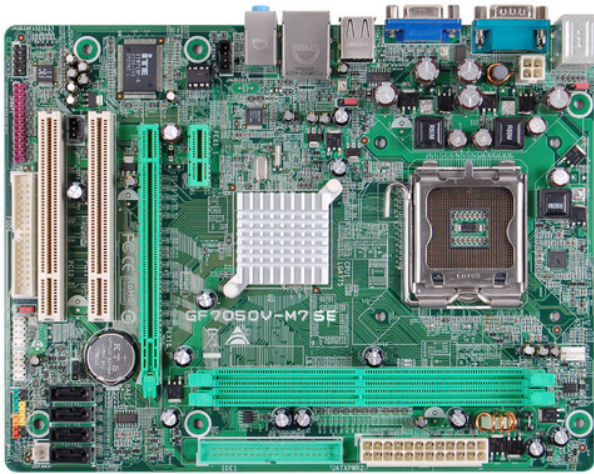

- Socket LGA 775
- Supports Intel Core 2 Extreme/Core 2 Quad/Core 2 Duo/Pentium D/Pentium 4/Celeron 400 Series/Celeron D Processor
- Supports FSB 800/1066/1333MHz
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

## GF7050V-M7 SE Specifcation

CPU SUPPORT	<p>Intel® Core™ 2 Extreme Processor          Intel® Core™ 2 Quad Processor          Intel® Core™ 2 Duo Processor          Intel® Pentium® Dual-Core Processor          Intel® Pentium® D Processor          Intel® Pentium® 4 Processor          Intel® Celeron® D Processor          Intel® Celeron® Processor 400 Sequence          Intel® Celeron® Processor</p>
FSB	Support FSB 800/1066/1333MHz
MEMORY	<p>Support DDR2 667/800 MHz          2 x DDR2 DIMM Memory Slot          Max. Supports up to 4GB Memory          ※DDR2 800MHz Will Operate In Overclocking Mode</p>
INTEGRATED VIDEO	NVIDIA GeForce 7050 GPU, On Board Graphic Max. Memory Share Up to 512MB(Under OS By Turbo Cache),GPU Frequency @500MHz
STORAGE	<p>4 x SATA II Connector          1 x IDE Connector          Support SATA RAID: 0,1</p>
LAN	Realtek RTL8201CL - 10/100 PHY

AUDIO CODEC	Realtek ALC662 6-Channel HD Audio
USB	4 x USB 2.0 Port 2 x USB 2.0 Header
EXPANSION SLOT	1 x PCI-E x16 Slot 1 x PCI-E x1 Slot 2 x PCI Slot
REAR I/O	1 x PS/2 Mouse 1 x PS/2 Keyboard 4 x USB 2.0 Port 1 x COM Port 1 x VGA Port 1 x LAN Port 3 x Audio Jacks
INTERNAL I/O	2 x USB 2.0 Header 4 x SATA II Connector (3Gb/s ) 1 x IDE Connector 1 x Floppy Connector 1 x Front Audio Header 1 x Front Panel Header 1 x CD-IN Header 1 x S/PDIF-Out Header 1 x CPU Fan Connector 1 x North Bridge FAN Header 1 x System Fan Connector 1 x Printer Port Header
DIMENSION	Micro ATX Form Factor Dimension: 18.5cm X 24.4cm ( W x L )
OS SUPPORT	Supports Windows XP / Vista
ACCESSORIES	1 x IDE Cable 1 x SATA Cable 1 x I/O Shield 1 x Fully Setup Driver CD 1 x Quick Guide

## GF7050V-M7 SE OVERVIEW

**\*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!**